


January 2014 sees the site erection phase of Pre-Fabricated Hardwood Roofs at Oil Nut Bay, Virgin Gorda.



The concurrent off-site roof manufacturing which has taken some six months to source, dry using the solar kiln, fabricate and finish, will enable the project to quickly move from Masonry to Finishing stage, significantly reducing the overall build programme period.

The 5000 Sq. feet of traditionally designed and constructed pitched roofs, manufactured from Andiroba Mahogany are pre-finished with the Clients selected stain colour and finish. Structural joints are reinforced with custom fabricated, epoxy coated, steel connectors, stainless steel bolts and hardwood bungs. Matching hardwood decking completes the structural roof package. All raw materials are from sustainable sources.

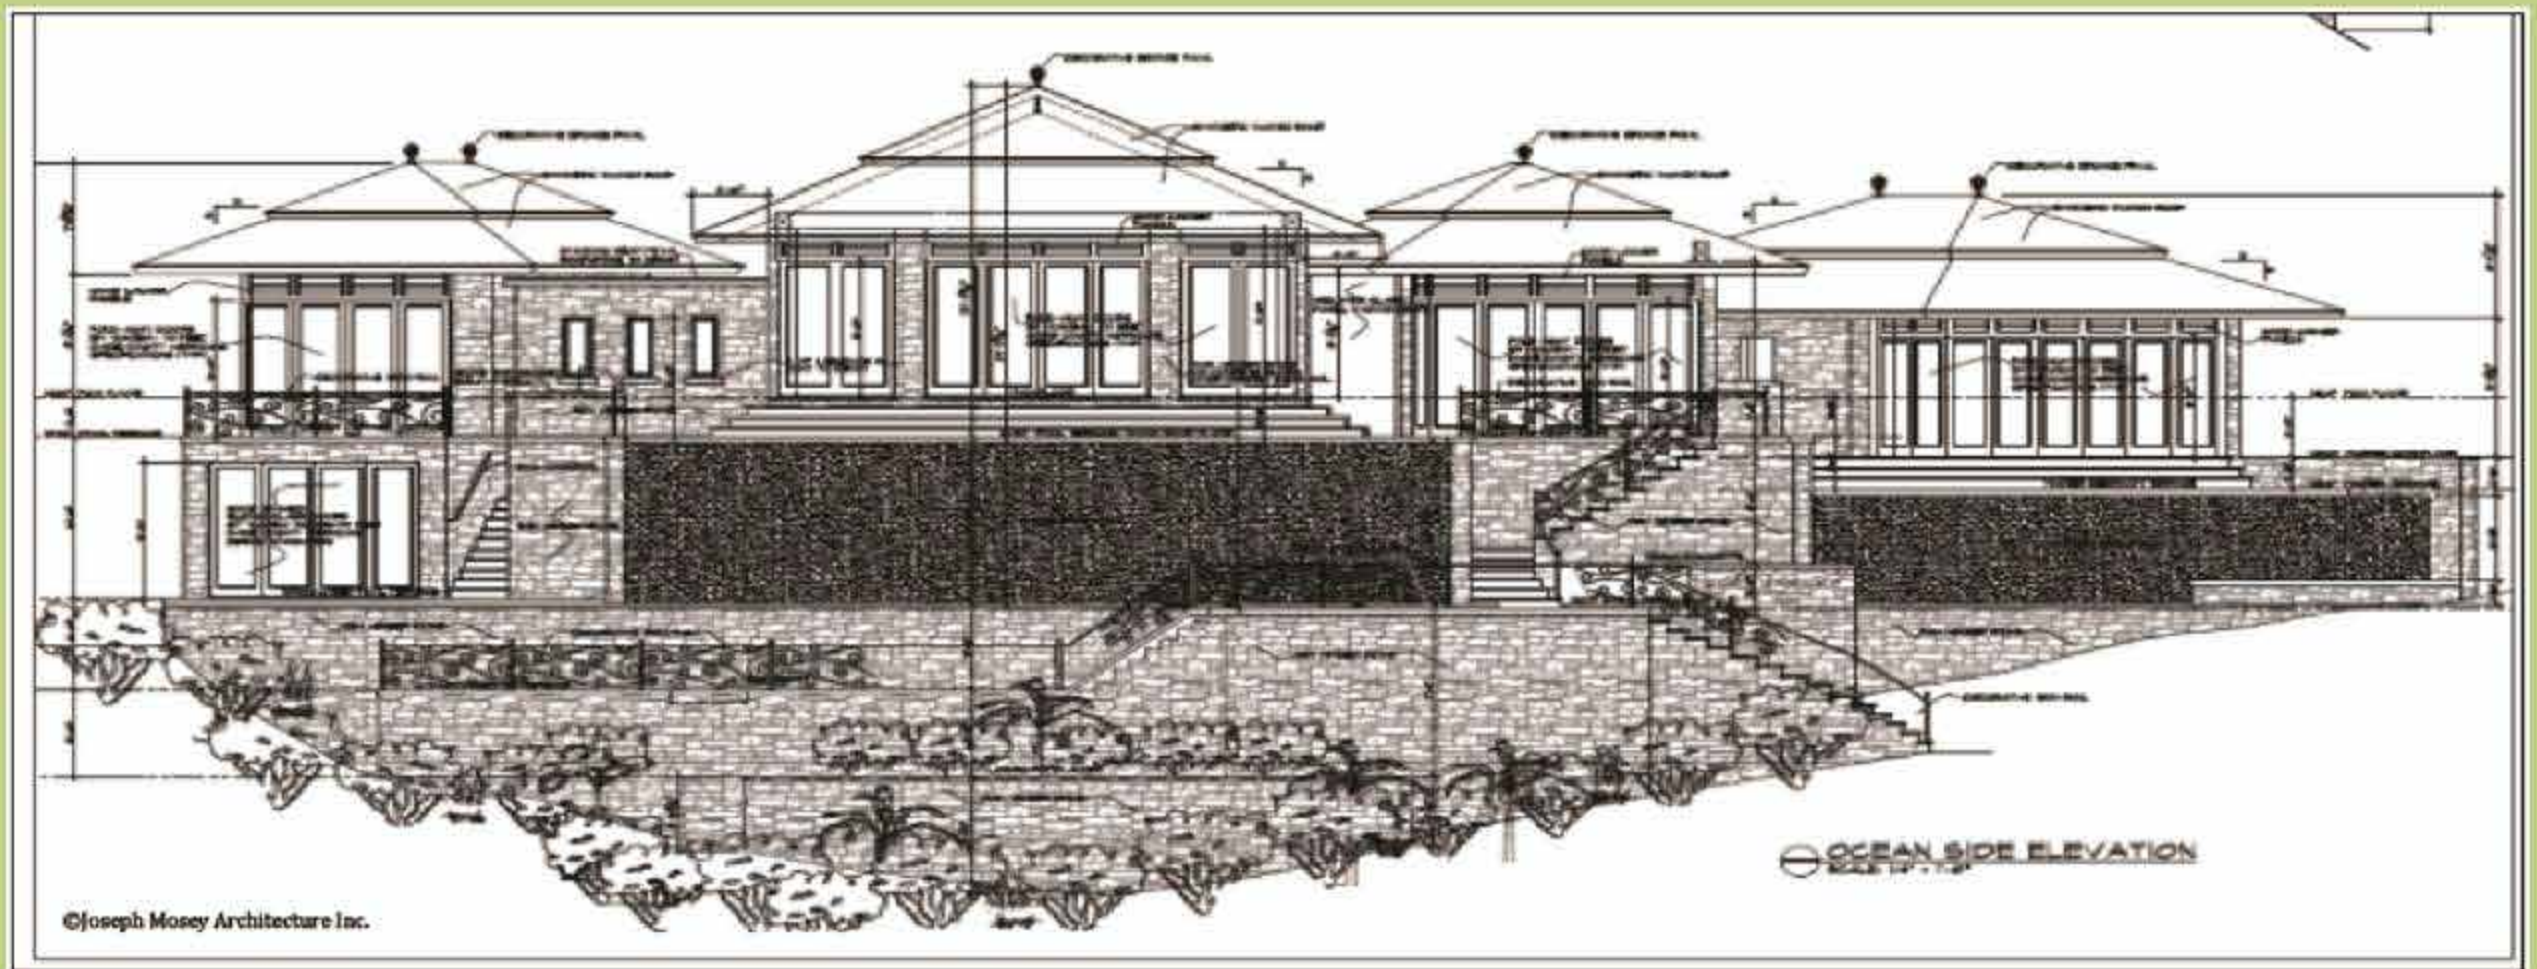

Following completion of the roof work, Custom Doors and Windows, Yoga Pavilion and Custom Cabinetry all made from Andiroba Mahogany with the matching finish will ensure a consistent coordinated look to the home.

All hardwood products custom manufactured by Messrs Woodenbridge Trading and Gallo Pinto Trading of Nicaragua.

Contact Us:: Stephen Cooper | [Stephen@eurocarib.com](mailto:Stephen@eurocarib.com) | Tel: +284 495 9616

Po Box 77, Road Town Tortola, VG1110 British Virgin Islands